


KORAK 1

Uklonite staru metlicu brisača i izaberite odgovarajući nosač. Većini vozila odgovara G nosač. Ukoliko je set G+6 adapter odgovarajući, nastavite ka **ZONI A** na sledećoj strani.



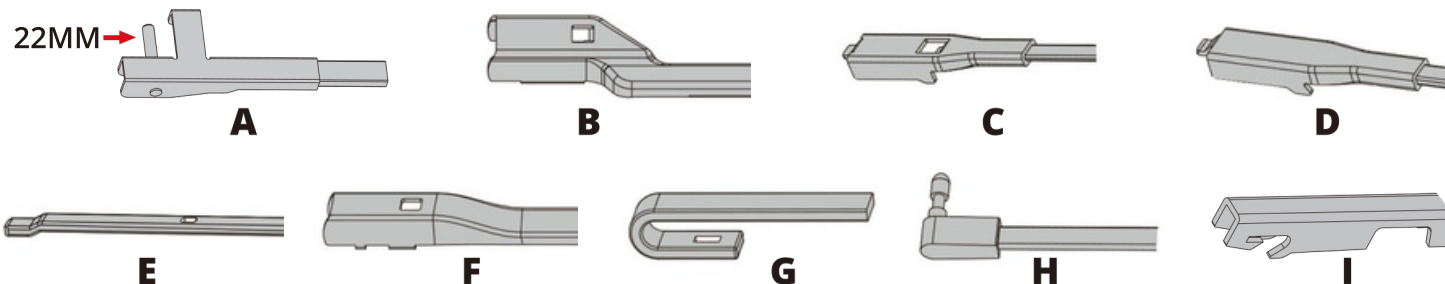


KORAK 2

Ova metlica brisača dolazi sa adapterom (6) koji je deo standardne opreme.



Alternativno, prepoznajte adapter koji odgovara nosaču metlice

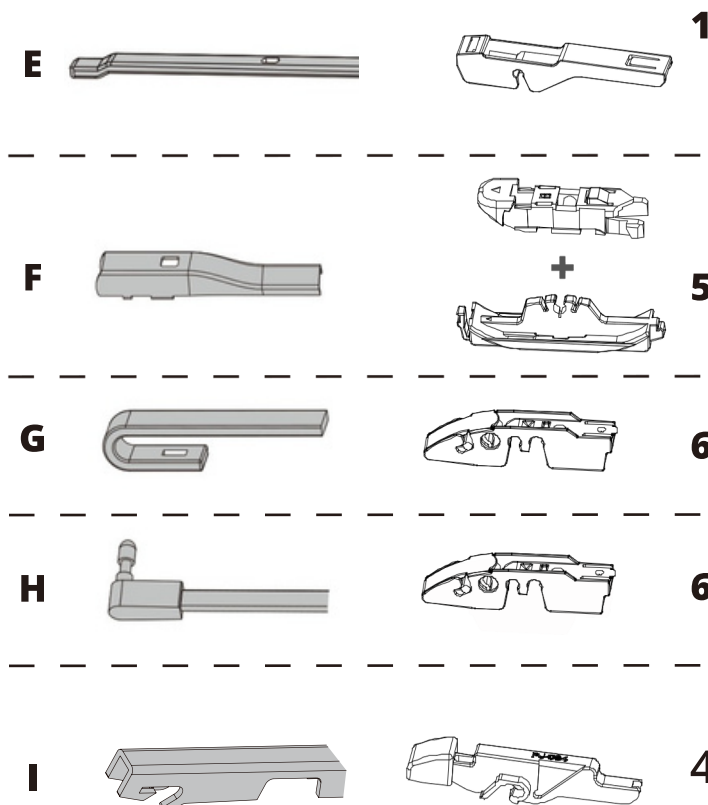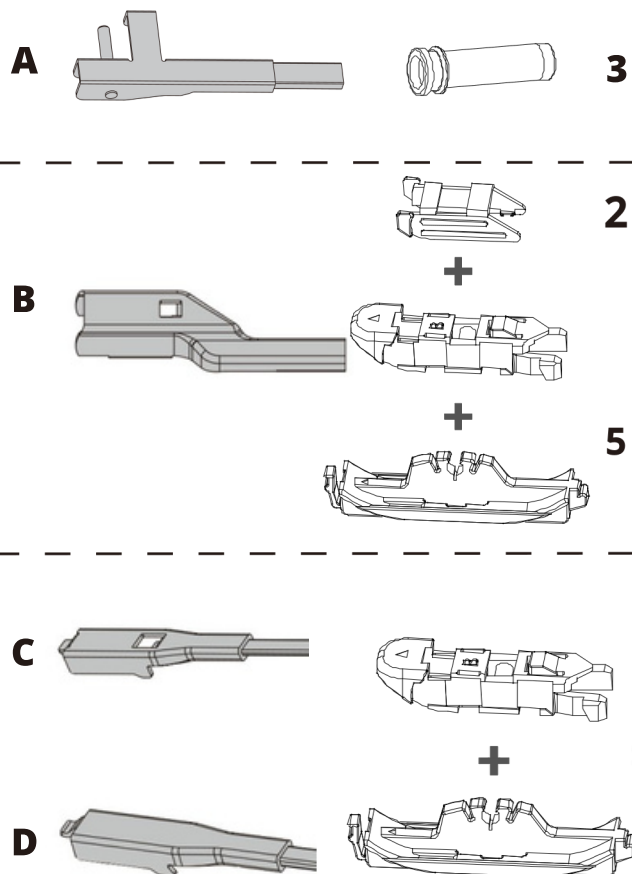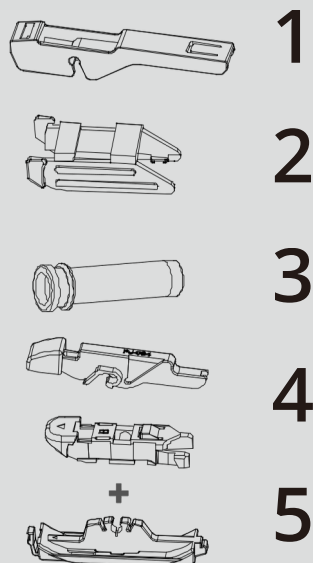

KORAK

3

Ako su metlica
brisača i konektor
tipa G+6, pratite
uputstvo za
montažu u **ZONI A**,
u suprotnom idite
na korak 4.

KORAK

4

Za zamenu
adaptera 6
drugim
adapterom, ubaci
alat (npr. ravni
šrafciğer) u
označeni prerez,
pazi da se ne
povrediš i lagano
podigni nagore da
ga izvadiš.

Montaža ide
obrnutim
redosledom –
vodi računa da je
jezičak na
adapteru pravilno
legao u ležište na
metlici pre nego
što pritisneš
adapter nadole
dok ne „klikne“.
Zatim prati
uputstvo za
montažu koje
odgovara nosaču
brisača i
adapteru.
Na kraju skini
zaštitni poklopac
sa metlice.

