


STEP 1

Remove the old wiper blade and identify the wiper blade arm. Most vehicles are fitted with G. If fitted with G +6 connector proceed to **ZONE A** on reverse.






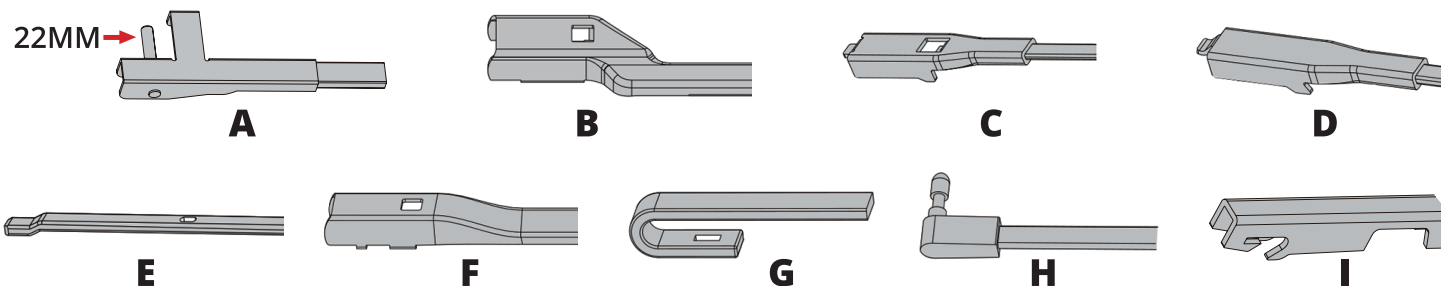


STEP 2

This wiper blade comes with connector (6) fitted as standard



Alternatively identify the connector that fits with the wiper blade arm

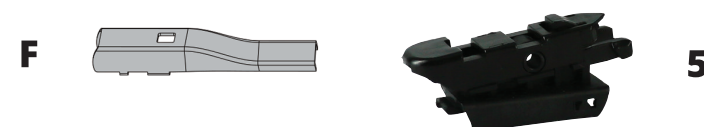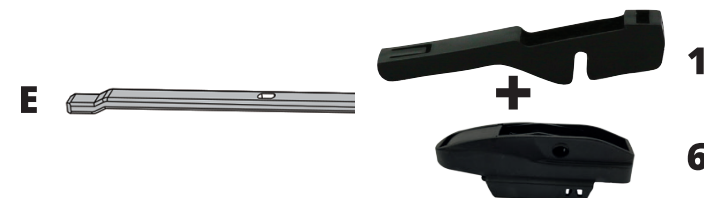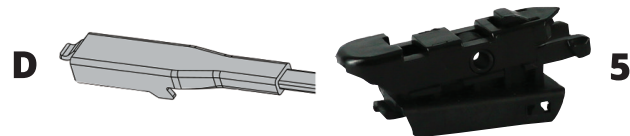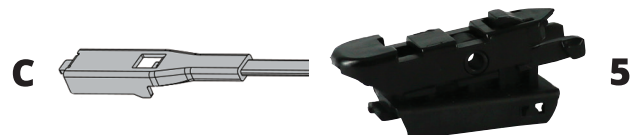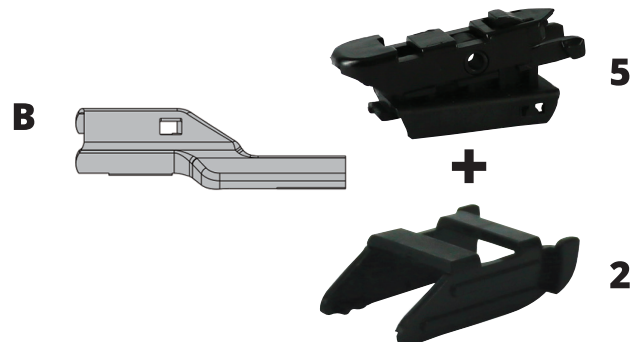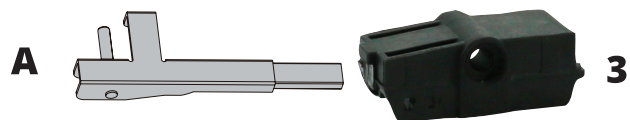

STEP 3

If the wiper blade and connector are G +6 proceed to **ZONE A** for the fitting guide otherwise see step 4.

STEP 4

To replace connector 6 with another connector, insert a tool like a flat-bladed screwdriver into the indicated gap, (Fig 1) taking care to avoid injury, and gently pry upward to remove it (Fig 2).

Replacement is the reverse action making sure the tab on the connector is fitted in the blade mount before pushing the connector down until it clicks. Now follow the fitting guide which matches the wiper arm and connector. Finally remove the protective cover from the blade.

